


Quick Align Table Connector

Assembly Instructions

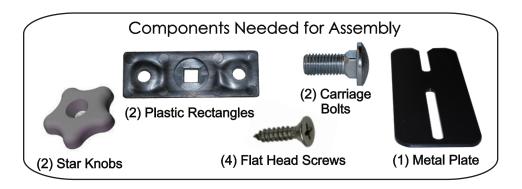

Instructions

- 1. Insert the carriage bolts through the center holes of the plastic rectangles so that the head of the carriage bolt is flush with plate and the stems pointing upward.
- 2. Place each of the plastic rectangles with the carriage bolts inside 1.5" away from each edge of the connecting table tops. They should be parallel to each other and at least 3" apart. Fasten them with 4 flat head screws.



- 3. Place the metal plate over the plastic rectangles so that the stems of the carriage bolts go through the openings of the metal plate.
- 4. Fasten the knobs onto each of the carriage bolt stems turning clockwise to tighten.
- 5. To connect the tables, line them up, slide the metal plate so that the carriage bolt is inside and tighten the knobs.
- 6. To disconnect the tables, loosen the knobs, slide the metal plate back, turn it sideways and secure with the knobs.







678-879-0777: phone www.specialT.net 678-456-6046: fax