

6 mm

(1)

(1)


ASSEMBLY INSTRUCTIONS

PARTS & HARDWARE LIST TOOLS Impact Drill C Е G Н (2)(12)(2)(2)(2)(20)(1) (1) #3 Phillips Bit **CAUTION** Safety Glasses **■ PROPER ASSEMBLY REQUIRES TWO PEOPLE ■ START BOLTS BY HAND TO PREVENT CROSS THREADING**


Ν

(4) (4) (1) ASSEMBLE ON A SOFT & SMOOTH SURFACE TO PREVENT SURFACE DAMAGE


LOCK WHEELS BEFORE LINKING TABLES TOGETHER

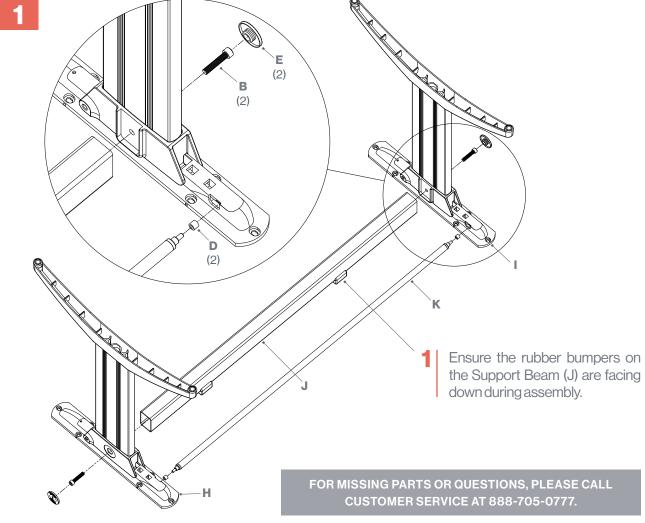



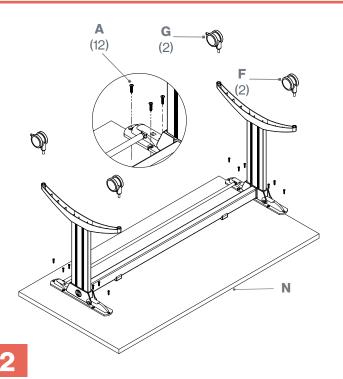

Install the locking casters (G) on the user side. The user side features the unlock bar (K).

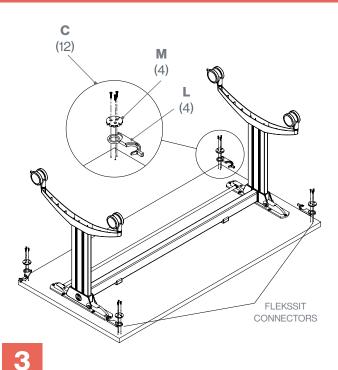

Install the 4 Flekssit connectors (L & M) on the corners only. Additional pre-drilled locations are available for non-standard configurations.



ASSEMBLED LINK FLIP & NEST TABLE

